

# Drum pump motors


## N-460

230 Volt, 50/60 Hz, 640 Watt, IP 55, II 2G Ex db IIC T6 Gb

Protection class II 2G Ex db IIC T6 Gb, IP 55, with integrated low voltage release, 5 m cable without plug. Optional with Ex-plug.



PERFORMANCE CURVE N-280

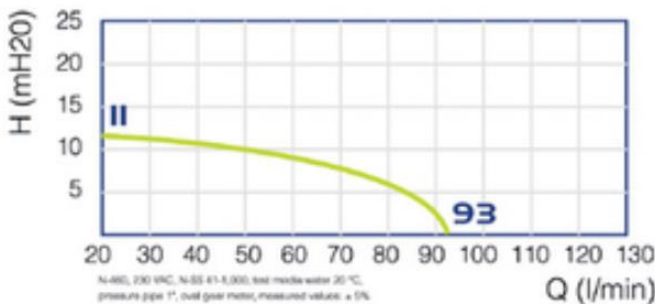

OPERATING DATA

Flow rate	up to 93 l/min
Head	up to 11m
Viscosity	up to 600 mPas
Density	up to 1,5

**Ex** II 2G Ex db IIC T6 Gb

N-460	Version	Voltage	Code
-------	---------	---------	------



with LVR

230 V 1~, 50/60 Hz, 640 W

1460 2301

LVR: Low voltage release